

Boom - tube Ø 35

Stainless
Steel

IP 65

Steel

IP 44

Classe II

Description

Product name: Boom - tube Ø 35 - Customizable

References: REG-T-9005
REG-T-9005-SS

Materiel: Steel or Stainless steel



Weight without tool: 3 kg

Maximum Capacity: 80 kg

Compatible remote control: R.O / R.1 / R.2




Technical drawings of tool (mm)

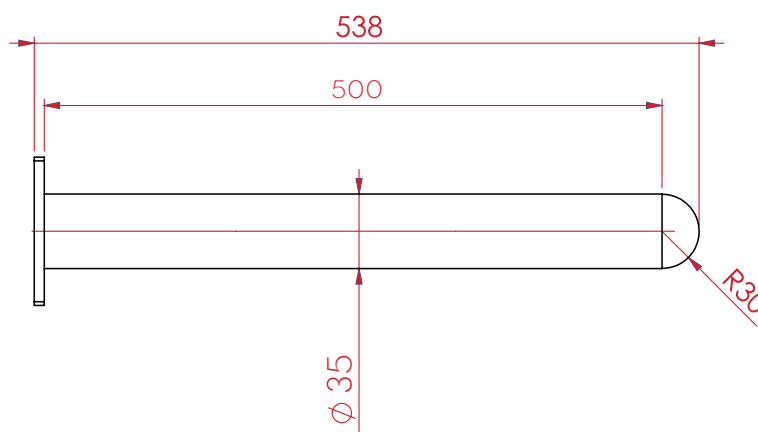

FABRICATION FRANÇAISE





Technical drawings

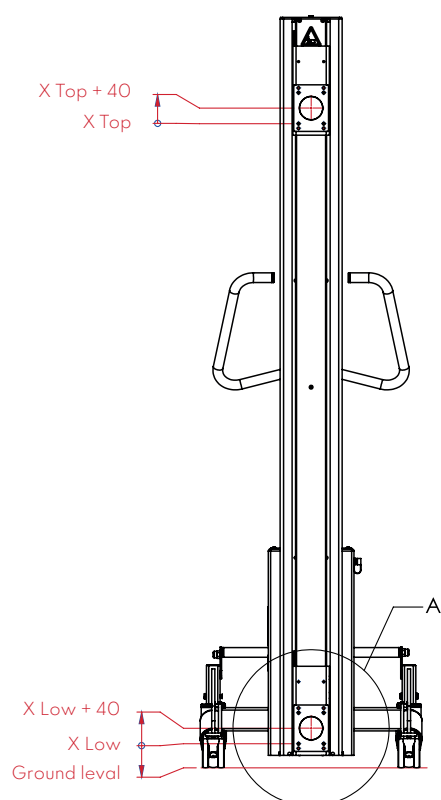

Trolley	Mast	Distance X in mm*		Stroke
		Low position	Top position	
R.55/65	XS	55	1020	965
	S	55	1255	1200
	M	55	1655	1600
R.85	S	60	1280	1220
	M	60	1660	1600
	L	60	2110	2050
R.125	S	60	1280	1220
	M	60	1660	1600
	L	60	2110	2050
R.205	XL	60	2660	2600
	S	60	1240	1180
	M	60	1620	1560
	L	60	2060	2000
	XL	60	2620	2560

Distance X = Distance from ground level to the first screw hole of the lifter mounting plate.

DÉTAIL A

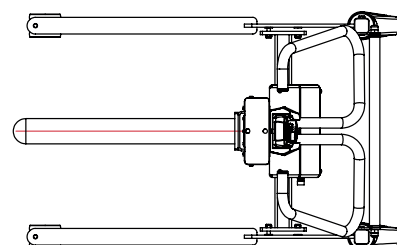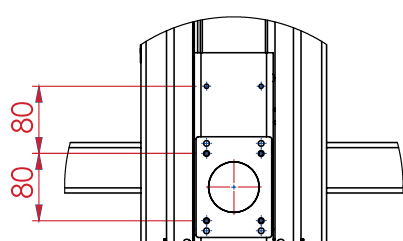

Possible Version



Boom with wheel +
V-Support



Double boom



Bearing Boom



Contact us:
02 28 21 73 95
info@reglift.fr

Visit our website:
www.reglift.fr

REGLIFT
ZAC La Belle Etoile - 19, rue Saturne
44119 Grandchamp-des-Fontaines